



FV-SP-XWB Float Valve Single Arm - Dual Float - Pivot

MATERIAL

- Valve body - corrosion grade Isophthalic Polyester
- Valve disc - corrosion grade Isophthalic Polyester
- Float Arm - Solid 316 SS
- Valve shaft - Solid 316 SS
- Hardware - 316 SS
- Float Ball - polyethylene

DESIGN

- In line installation only
- 4", 6" and 8" only
- Bolt pattern - ANSI 150
- Float arm threaded 3/8" for float
- Valve disc molded onto valve shaft
- Approximately 20% flow when fully closed
- Upper float weighted to avoid valve lock
- Arm on left (looking into flow)

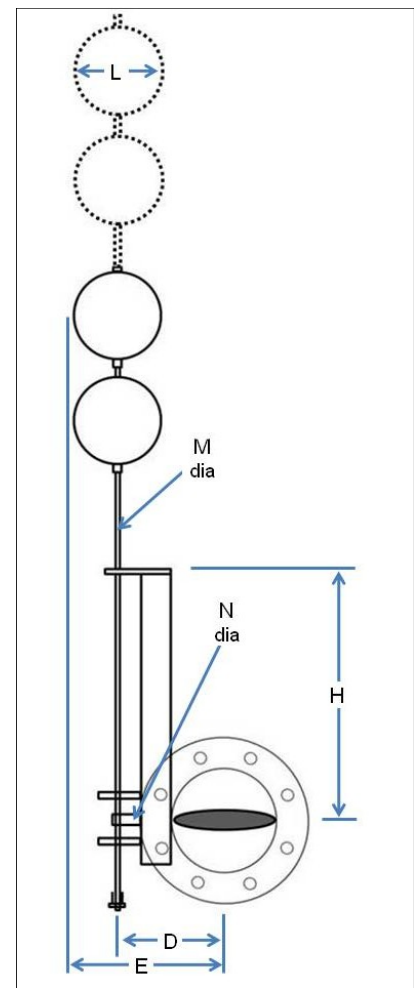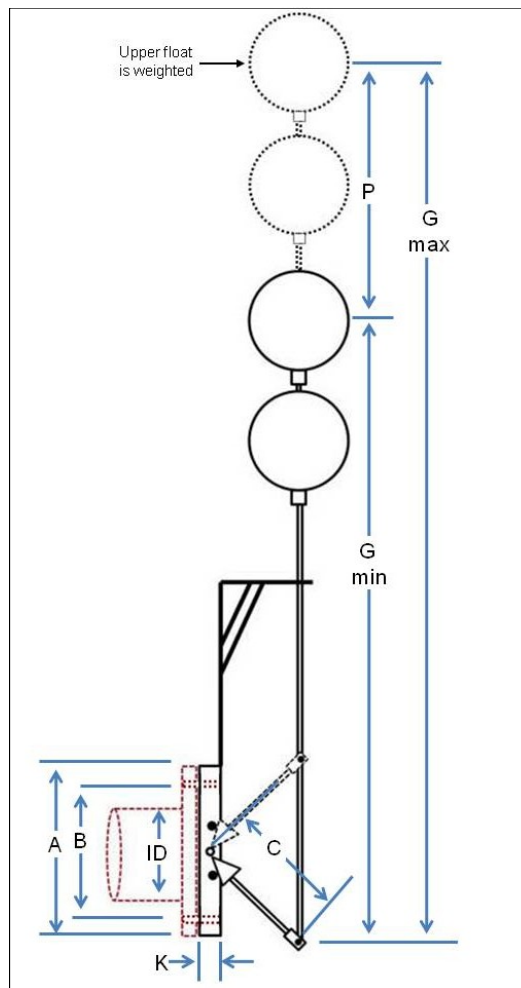

ID	A	B	C	D	E	F	G min	G max	H	K	L	M	N	P
4"	9 1/2"	7 1/2"	8"	6 5/8"	10 1/8"	21"	36"	54"	26"	1"	8"	3/8"	1/2"	18"
6"	11 1/2"	9 1/2"	8"	7 5/8"	11 1/8"	22 1/4"	36"	54"	25 1/2"	1"	8"	3/8"	1/2"	18"
8"	14"	11 3/4"	8"	8 7/8"	12 3/8"	24 3/4"	36"	54"	25"	1 1/2"	8"	5/8"	3/4"	18"

