


## FV-S-XWB Float Valve Single Arm - Dual Float





**MATERIAL**

- Valve body - corrosion grade Isophthalic Polyester
- Valve disc - corrosion grade Isophthalic Polyester
- Float Arm - Solid 316 SS
- Valve shaft - Solid 316 SS
- Hardware - 316 SS
- Float Ball - polyethylene

**DESIGN**

In line installation only  
 Not for end of pipe installation  
 4", 6" and 8" only  
 Bolt pattern - ANSI 150  
 Valve disc molded onto valve shaft

SS arm threaded 3/8" for float attachment  
 Approximately 20% flow when closed  
 Upper float weighted to avoid valve lock  
 Arm on left (looking into flow)

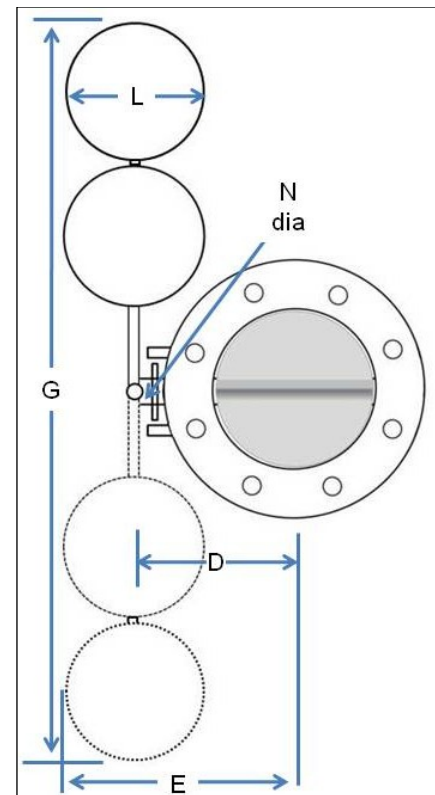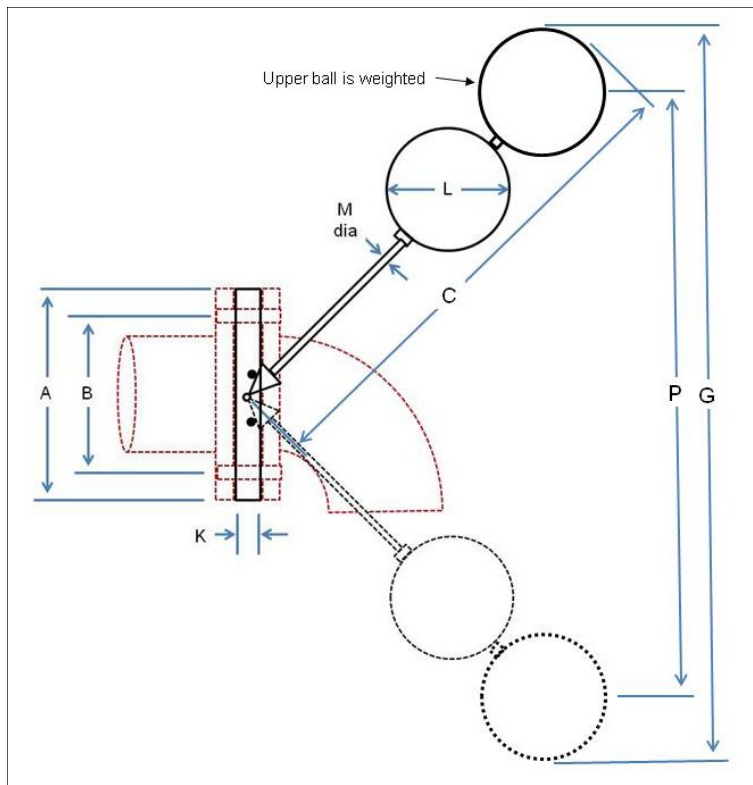

ID	A	B	C	D	E	G	K	L	M	N	P
4"	9 1/2"	7 1/2"	32"	6 5/8"	10 1/8"	48"	1"	8"	5/8"	3/4"	40"
6"	11 1/2"	9 1/2"	32"	7 5/8"	11 1/8"	48"	1"	8"	5/8"	3/4"	40"
8"	14"	11 3/4"	32"	8 7/8"	12 3/8"	48"	1 1/2"	8"	5/8"	3/4"	40"

