

# Mer-Made Data Sheet





## FV-DP-XWB Float Valve Dual Arm - Dual Float - Pivot

### MATERIAL

Valve body - corrosion grade Isophthalic Polyester  
 Valve disc - corrosion grade Isophthalic Polyester  
 Float Arm - Solid 316 SS  
 Valve shaft - Solid 316 SS  
 Hardware - 316 SS  
 Float Ball - polyethylene

### DESIGN

In line and end-of-pipe installation  
 For 4" through 16" pipe  
 Bolt pattern - ANSI 150  
 Float arm threaded 3/8" for float  
 Valve disc molded onto valve shaft  
 Approximately 20% flow when fully closed  
 Inner float weighted to avoid valve lock

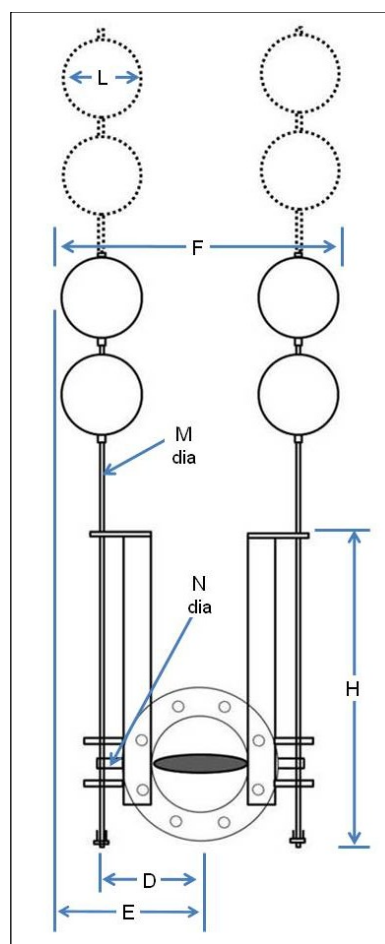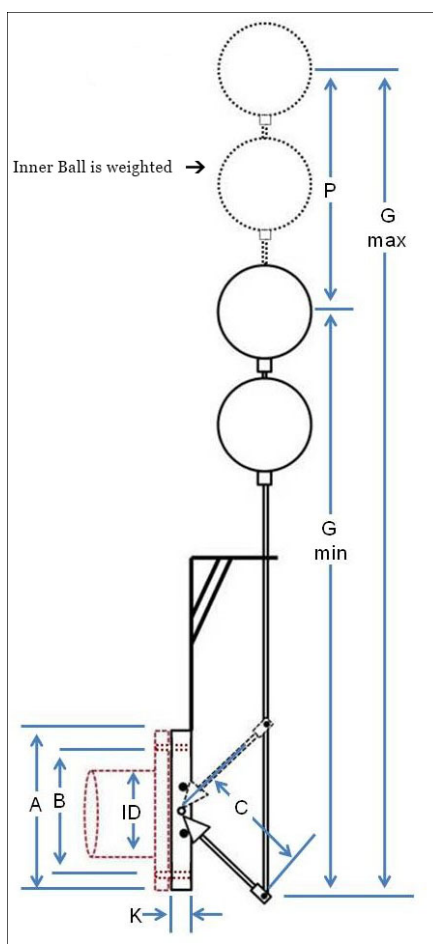

ID	A	B	C	D	E	F	G min	G max	H	K	L	M	N	P
4"	9 1/2"	7 1/2"	8"	6 5/8"	10 1/2"	21"	36"	46"	26"	1"	8"	3/8"	1/2"	10"
6"	11 1/2"	9 1/2"	8"	7 5/8"	11 1/8"	22 1/4"	36"	46"	25 1/2"	1"	8"	3/8"	1/2"	10"
8"	14"	11 3/4"	8"	8 7/8"	12 3/8"	24 3/4"	36"	46"	25"	1 1/2"	8"	5/8"	3/4"	10"
10"	16 1/2"	14 1/4"	8"	9 7/8"	13 3/8"	26 3/4"	36"	46"	24 1/2"	1 1/2"	8"	5/8"	3/4"	10"
12"	19 1/2"	17"	8"	11 3/8"	15 1/8"	29 3/4"	36"	46"	24"	1 1/2"	8"	5/8"	3/4"	10"
14"	21 1/2"	18 3/4"	8"	12 3/8"	15 7/8"	31 3/4"	36"	46"	23 1/2"	1 1/2"	8"	5/8"	3/4"	10"
16"	24"	21 1/4"	8"	13 3/8"	16 7/8"	33 3/4"	36"	46"	24"	2"	8"	5/8"	3/4"	10"



Mer-Made Filter

Division of North American Filtration Inc.

11746 Charleston-Augusta Highway  
 Ph 803.793.4265 Fax 803.793.4332

Denmark, SC 29042  
 www.mermade.com

