


FV-D-XWB Float Valve Dual Arm - Dual Float





MATERIAL

- Valve body - corrosion grade Isophthalic Polyester
- Valve disc - corrosion grade Isophthalic Polyester
- Float Arm - Solid 316 SS
- Valve shaft - Solid 316 SS
- Hardware - 316 SS
- Float Ball - polyethylene

DESIGN

End of open pipe 14" and 16" only
In-line installation 4" through 16"
Bolt pattern - ANSI 150
Valve disc molded onto valve shaft

SS arm threaded 3/8" for float attachment
Approximately 20% flow when closed
Upper float weighted to avoid valve lock

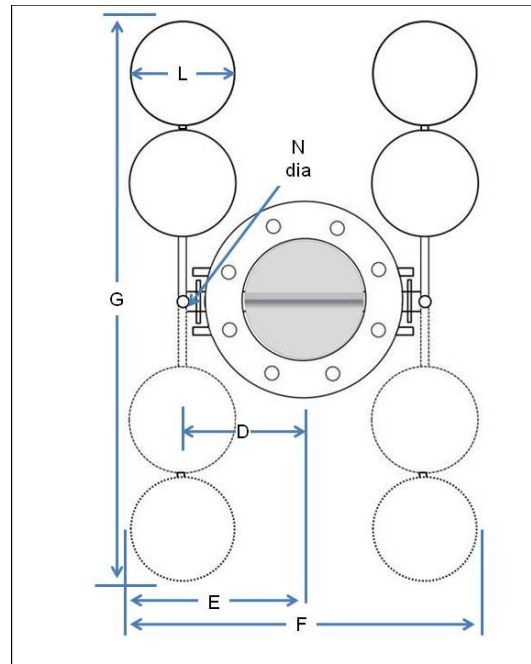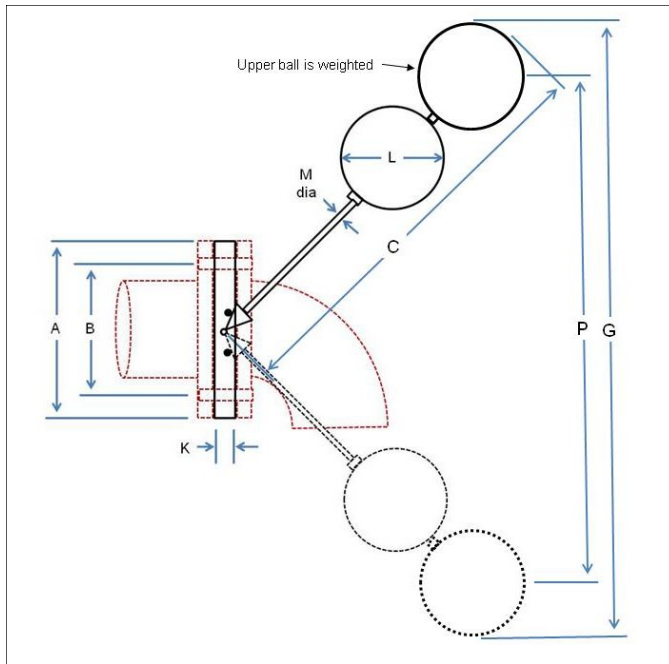

ID	A	B	C	D	E	F	G	K	L	M	N	P
4"	9 1/2"	7 1/2"	32"	6 5/8"	10 1/8"	20 1/4"	48"	1"	8"	3/8"	1/2"	40"
6"	11 1/2"	9 1/2"	32"	7 5/8"	11 1/8"	22 1/4"	48"	1"	8"	3/8"	1/2"	40"
8"	14"	11 3/4"	32"	8 7/8"	12 3/8"	24 3/4"	48"	1 1/2"	8"	5/8"	3/4"	40"
10"	16 1/2"	14 1/4"	32"	9 7/8"	13 3/8"	26 3/4"	48"	1 1/2"	8"	5/8"	3/4"	40"
12"	19 1/2"	17"	32"	11 3/8"	14 7/8"	29 3/4"	53"	1 1/2"	8"	5/8"	3/4"	45"
14"	21 1/2"	18 3/4"	32"	12 3/8"	15 7/8"	31 3/4"	53"	1 1/2"	8"	5/8"	3/4"	45"
16"	24"	21 1/4"	32"	13 3/8"	16 7/8"	33 3/4"	53"	2"	8"	5/8"	3/4"	45"

